


# HMI Project Update to the cMT3072X Maple Systems Display

26. June 2024

This quick reference guide describes how to update the project in a Maple Systems HMI (cMT3072X) with a USB flash drive.

The project download file, '**project.cxob**', will be download to the HMI from a USB flash drive. The file will need to reside in the root directory of the flash drive.


1. With the 'project.cxob' copied to the root directory of the flash drive, insert the drive in the USB port at the back of the HMI. This is located next to the RS-232 serial communications port.
2. When a flash drive is first inserted into the USB port of the cMTX series HMI, the following dialog box is displayed:

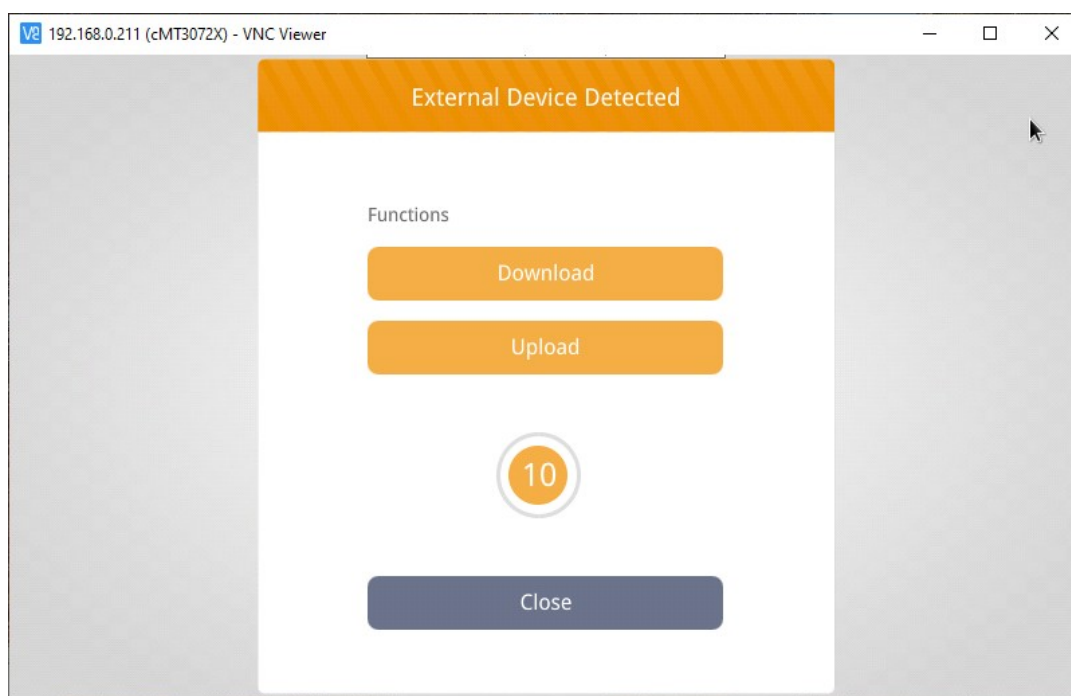


3. Click on the '**Download**' button to transfer data from the flash drive to the HMI

4. A Download selection dialog box will be displayed. Select “**Project:**” for the Download. The **password will be 6 1’s (11111)**. Select the folder icon in the Project box and drill down to the ‘project.cxob’ file.


**Note:** If the project file is located in the root directory of the flash drive then the path will be: */usbdisk/disk\_a\_1*

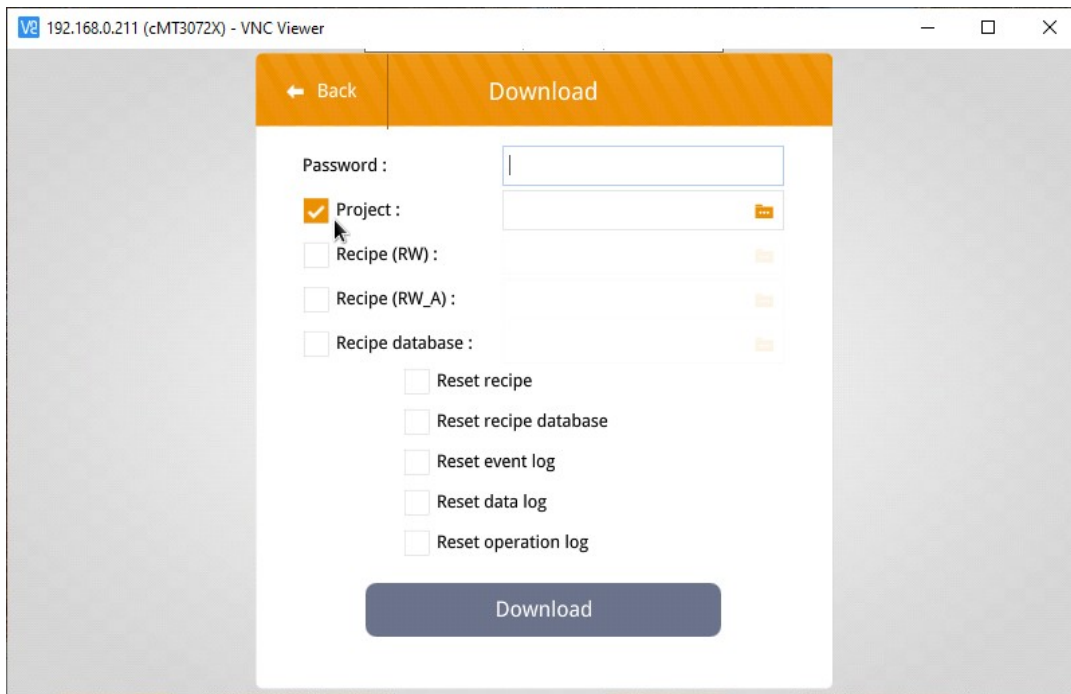


5. Select the ‘project.cxob’ file and click on the **Ok** button.

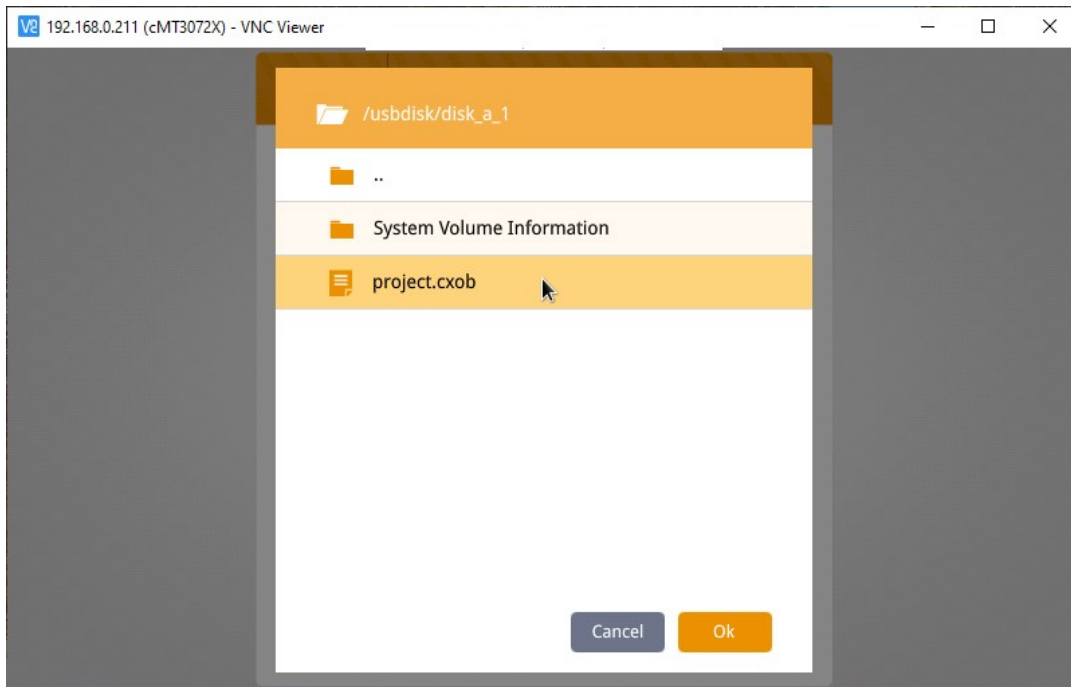

6. With the Password entered and the 'project.cxob' selected, click on the Download button to initiate the update process.

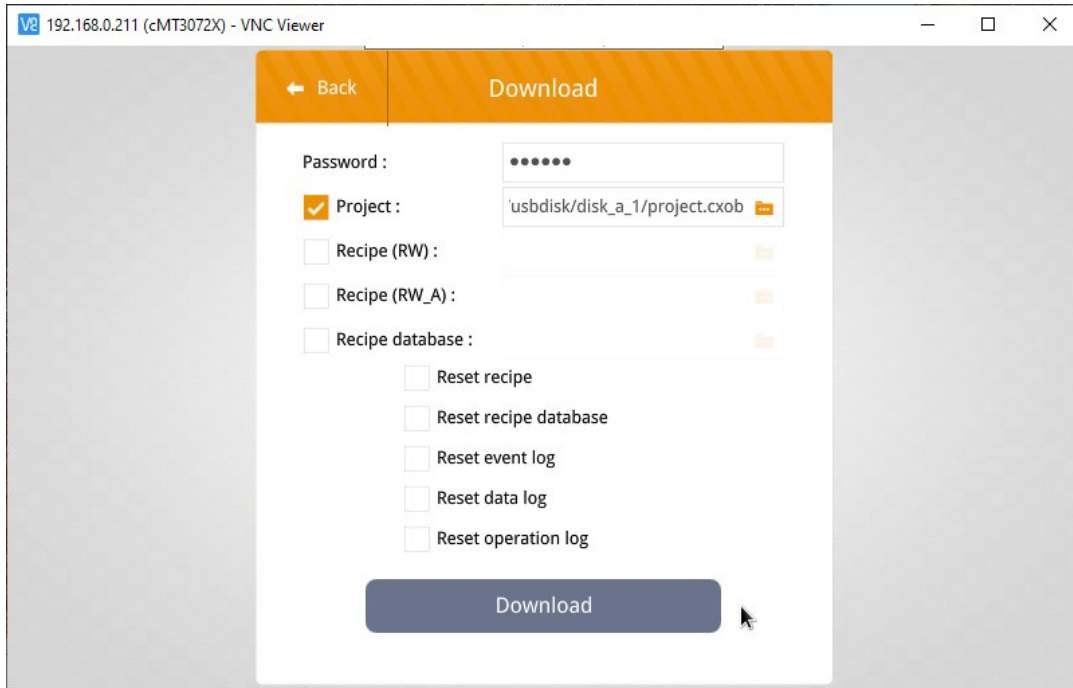

7. The project will update automatically.

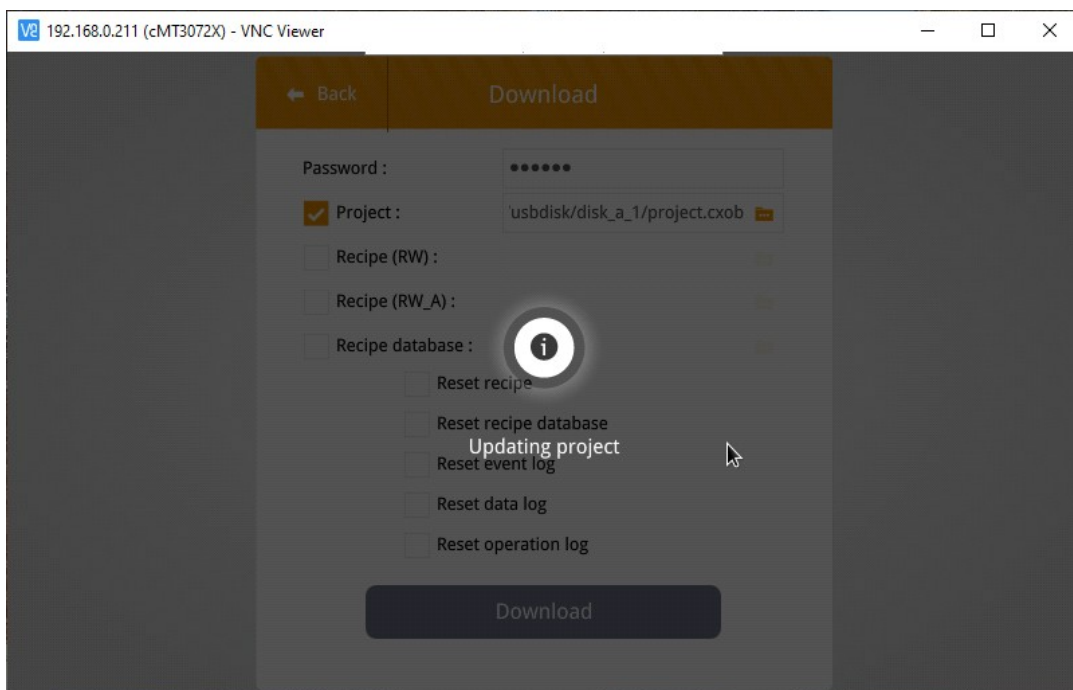

8. When the update is complete, the HMI automatically reboots and runs the project. After the project restarts, remove the flash drive from the USB port. Project update is now complete.

